



Belimo ZoneTight™ Zone Valves Efficient in Every Way



Discover the advantages
www.belimo.com

BELIMO
®

Efficient in Every Way

Designed for maximum efficiency in tight spaces, Belimo's ZoneTight valve offering sets new design and performance standards for both pressure dependent and pressure independent zoning applications.




QCV with Electronic Fail-Safe Actuator

ZoneTight Zone Valve (QCV)

The ultra-compact QCV leads the way in Belimo's new generation of room and zone solutions. Equipped with a space-saving 2-way or 3-way ball valve and an electronic rotary actuator, the QCV has an installation height of just 4.33 inches (110 mm) and offers a number of benefits over conventional pressure dependent control valves.

- Belimo ball valve design with zero leakage eliminates energy loss.
- Self-cleaning ball valve technology provides superior clog resistance.
- 95% less power consumption than conventional zone valves.
- Field adjustable Cv value to meet your design requirements.

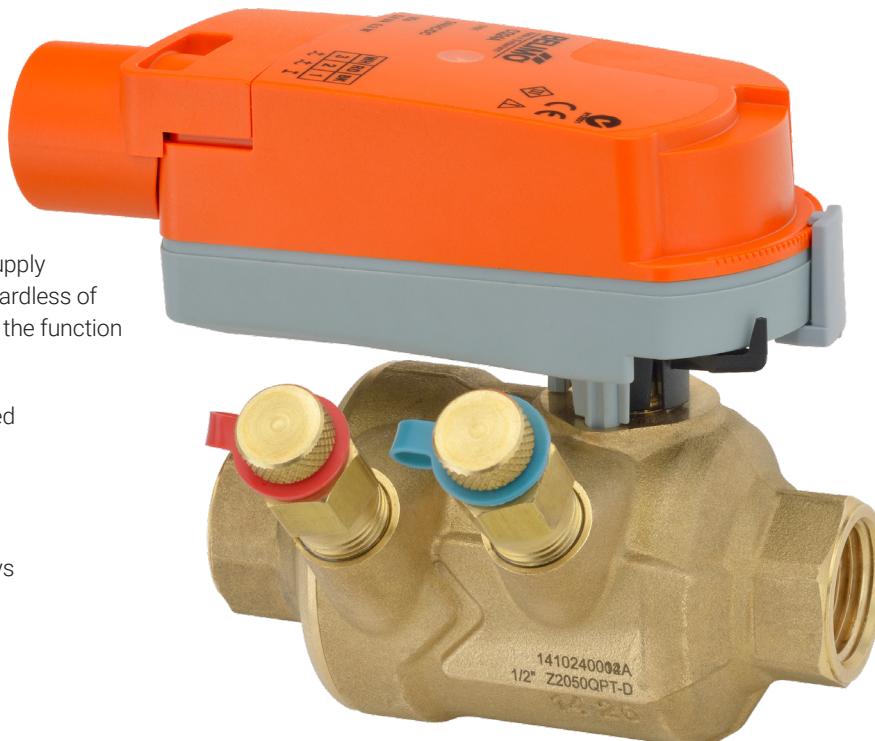

PIQCV with Non-Spring Return Actuator



5-year warranty

More Than a Standard Zone Valve

Ball Valve Technology

Unlike short stroke globe valves, the self-cleaning ball helps minimize energy losses caused by clogging and eliminates overflow from pump pressure seat lift. In addition, high close-off capabilities ensure shut-off (0% A – AB leakage) and allow for true equal percentage flow characteristics.



Actuator with Patented Brushless DC Motor

The brushless DC motor's power consumption when running is a mere 0.3W, 0.2W when holding, saving energy and transformer power. In addition to significantly reducing energy costs, this helps eliminate failures due to stalled motors and prolongs actuator life. It also allows for more units to be powered by a single transformer.



Snap Fit

The QCV and PIQCV easily connects to the actuator allowing operators and technicians to install valves quickly, easily, and without the use of tools. This helps simplify commissioning and reduces labor costs.



Field Adjustable Max Cv/Flow

QCVs and PIQCVs can be quickly and easily field adjusted to ensure that necessary design requirements are met and reduces inventory.

Stem Extension for Insulation

Unlike conventional zone valve actuators, which are normally covered by pipe insulation, the stem extension on QCVs and PIQCVs allows for easy actuator removal without damaging the surrounding insulation, helping simplify operation and maintenance activities.

Overall Benefits

- Increased reliability, even after powered-close during off periods.
- Ball valve technology avoids clogging.
- Patented brushless DC motor runs at only 0.3 W maximizing energy savings.
- Zero leakage means no energy losses.
- Ultra-compact design allows for installation in tight areas.
- Field set adjustment of Cv and maximum flow is fast.
- Valve and actuator snap together quickly and easily; no tools are required for assembly or flow adjustment.
- Comprehensive 5-year warranty.
- Available electronic fail-safe or non-spring return actuator to meet application requirements.

Accessories

	Stem Extension (for use with QCV/PIQCV)	Insulation Spacer	Error Proof Positioning
	Manual Flow Setter (for use with QCV/PIQCV)	Flow Limiter for easy flow setting. No tools are required	Snap Fit
	Flow Orifice Device	Manometer Readings = Flow	Stand Alone
	Architectural Cover (for use with CQ Actuators)	Simple Design covers complete actuator	Snap Fit no tools are required

ZoneTight Series

	C_V	Inches	DN [mm]	2-way	3-way	Non Fail-Safe	Fail-Safe
	NPT	1.4*	1/2	15	Z2050Q-F		
		5.9*	1/2	15	Z2050Q-J		
		9.8*	3/4	20	Z2075Q-K		
		8.2*	1	25	Z2100Q-K		
		1	1/2	15		Z3050Q-E	
		2.7	1/2	15		Z3050Q-H	
		4.6	3/4	20		Z3075Q-J	
		4.4	1	25		Z3100Q-J	
		1.4*	1/2	15	Z2050QS-F		
		5.9*	1/2	15	Z2050QS-J		
	Sweat	9.8*	3/4	20	Z2075QS-K		
		8.2*	1	25	Z2100QS-K		
		1	1/2	15		Z3050QS-E	
		2.7	1/2	15		Z3050QS-H	
		4.6	3/4	20		Z3075QS-J	
		4.4	1	25		Z3100QS-J	
		1.4*	1/2	15	Z2050QPF-F		
		5.9*	1/2	15	Z2050QPF-J		
		9.8*	3/4	20	Z2075QPF-K		
		8.2*	1	25	Z2100QPF-K		
	Press Fit	1	1/2	15		Z3050QPF-E	
		2.7	1/2	15		Z3050QPF-H	
		4.6	3/4	20		Z3075QPF-J	
		4.4	1	25		Z3100QPF-J	
		1.4*	1/2	15	Z2050QPT-B		
		2.0*	1/2	15	Z2050QPT-D		
		4.3*	1/2	15	Z2050QPT-F		
		9.0*	3/4	20	Z2075QPT-G		
		0.9*	1/2	15	Z2050QPTPF-B		
		2.0*	1/2	15	Z2050QPTPF-D		
	Press Fit	4.3*	1/2	15	Z2050QPTPF-F		
		9.0*	3/4	20	Z2075QPTPF-G		

*Maximum flow value can be field adjusted, see actuator instructions.
Order "X" model actuators for Factory Clip Setting, see instruction manual for details.