


3-way Mixing/Diverting, Characterized Control Valve, Chrome Plated Brass Ball and Nickel Plated Brass Stem



Picture may differ from product



5-year warranty



## Type overview

| Type  | DN        |
|-------|-----------|
| B308B | 1/2" [15] |

## Technical data

|                                 |  |                          |
|---------------------------------|--|--------------------------|
| <b>Functional data</b>          | Valve size [mm]  | 0.5" [15]                |
| Fluid                           | chilled or hot water, up to 60% glycol                                 |                          |
| Fluid Temp Range (water)        | 0...250°F [-18...120°C]  |                          |
| Body Pressure Rating            | 600 psi  |                          |
| Close-off pressure $\Delta p_s$ | 200 psi  |                          |
| Flow                            | A-port: as stated in chart B-port: 70% of A - AB<br>Cv                 |                          |
| Flow characteristic             | A-port equal percentage, B-port modified for constant common port flow |                          |
| Leakage rate                    | 0% for A - AB, <2.0% for B - AB  |                          |
| Pipe connection                 | Internal thread<br>NPT (female)  |                          |
| Servicing                       | maintenance-free   |                          |
| Flow Pattern                    | 3-way Mixing/Diverting   |                          |
| Controllable flow range         | 75°  |                          |
| Cv                              | 0.46   |                          |
| <b>Materials</b>                | Valve body   | Nickel-plated brass body |
|                                 | Stem   | nickel-plated brass      |
|                                 | Stem seal  | EPDM (lubricated)        |
|                                 | Seat   | PTFE                     |
|                                 | Characterized disc   | TEFZEL®                  |
|                                 | O-ring   | EPDM (lubricated)        |
|                                 | Ball   | chrome plated brass      |
| <b>Suitable actuators</b>       | Non Fail-Safe  | TR<br>LRB(X)             |
|                                 | Spring   | TFRB(X)<br>LF            |
|                                 |  |                          |

## Safety notes



- WARNING: This product can expose you to lead which is known to the State of California to cause cancer and reproductive harm. For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)


## Product features

## Application

This valve is typically used in air handling units on heating or cooling coils, and fan coil unit heating or cooling coils. Some other common applications include Unit Ventilators, VAV box re-heat coils and bypass loops. This valve is suitable for use in a hydronic system with variable or constant flow.



## Flow/Mounting details

This valve is not suitable for use as a change over valve.

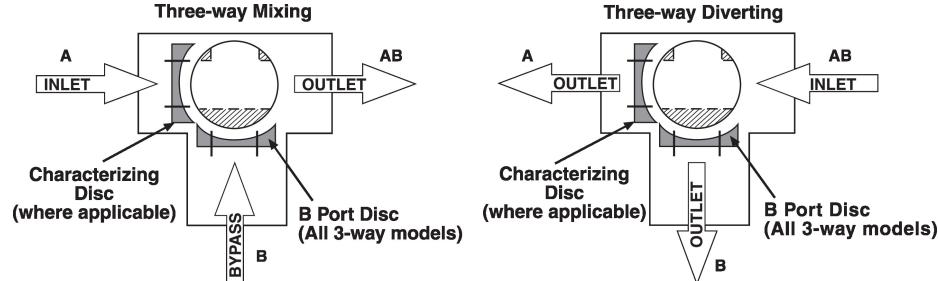


## Dimensions

| Type  | DN        | Weight            |
|-------|-----------|-------------------|
| B308B | 1/2" [15] | 0.59 lb [0.27 kg] |

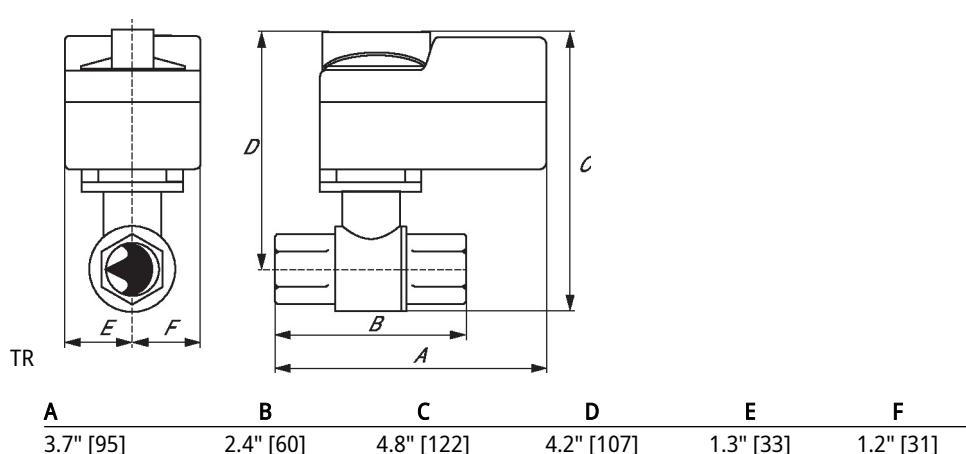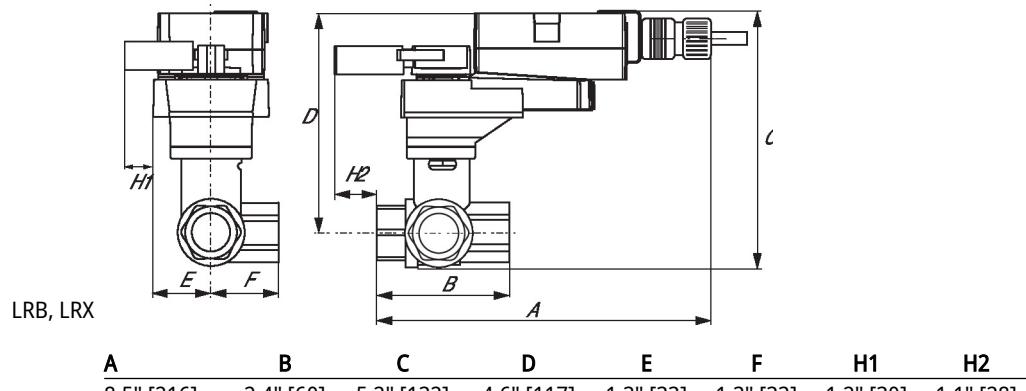

## Dimensions

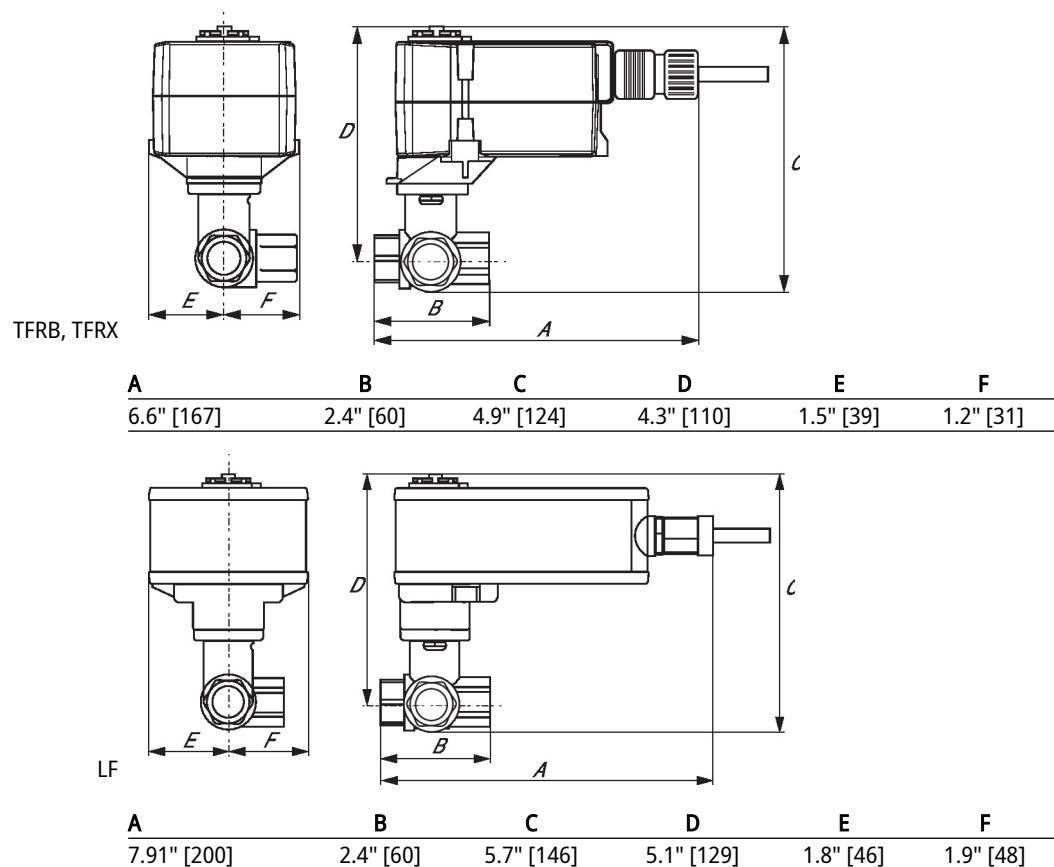

The technical drawings illustrate the dimensions of two BELIMO actuators: TFRB and LF. The top row shows the TFRB model, and the bottom row shows the LF model. Each row contains a front view on the left and a side view on the right. The side view indicates height dimensions D and C, width dimension A, and depth dimension B. The front view indicates width dimensions E and F. Below each row is a table listing the dimension values in inches and millimeters.

| A          | B         | C          | D          | E         | F         |
|------------|-----------|------------|------------|-----------|-----------|
| 6.6" [167] | 2.4" [60] | 4.9" [124] | 4.3" [110] | 1.5" [39] | 1.2" [31] |

| A           | B         | C          | D          | E         | F         |
|-------------|-----------|------------|------------|-----------|-----------|
| 7.91" [200] | 2.4" [60] | 5.7" [146] | 5.1" [129] | 1.8" [46] | 1.9" [48] |

On/Off, Non fail-safe, 24 V



5-year warranty



## Technical data

| Electrical data | Nominal voltage                | AC 24 V   |
|-----------------|--------------------------------|---|
|                 | Nominal voltage frequency      | 50/60 Hz  |
|                 | Nominal voltage range          | AC 19.2...28.8 V  |
|                 | Power consumption in operation | 1 W   |
|                 | Transformer sizing             | 1 VA  |
|                 | Electrical Connection          | Plenum cable 18 GA, 10 ft [3 m]   |
|                 | Overload Protection            | electronic throughout full rotation   |
| Functional data | Manual override                | push down handle  |
|                 | Angle of rotation              | 90°   |
|                 | Running Time (Motor)           | 90 s / 90°  |
|                 | Noise level, motor             | 35 dB(A)  |
|                 | Position indication            | integrated into handle  |
| Safety data     | Power source UL                | Class 2 Supply  |
|                 | Degree of protection IEC/EN    | IP40  |
|                 | Degree of protection NEMA/UL   | NEMA 1  |
|                 | Enclosure                      | UL Enclosure Type 1   |
|                 | Agency Listing                 | cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02<br>CE acc. to 2014/30/EU and 2014/35/EU |
|                 | Quality Standard               | ISO 9001  |
|                 | UL 2043 Compliant              | Suitable for use in air plenums per Section 300.22(C) of the NEC and Section 602 of the IMC |
|                 | Ambient humidity               | Max. 95% RH, non-condensing   |
|                 | Ambient temperature            | -22...122°F [-30...50°C]  |
|                 | Storage temperature            | -40...176°F [-40...80°C]  |
|                 | Servicing                      | maintenance-free  |
| Weight          | Weight                         | 0.69 lb [0.31 kg]   |

## Electrical installation


**☒ INSTALLATION NOTES**

- ☒ Provide overload protection and disconnect as required.
- ☒ Actuators cannot be wired in parallel.
- ☒ Actuators with plenum cable do not have numbers; use color codes instead.
- ☒ Meets cULus requirements without the need of an electrical ground connection.
- ☒ **Warning! Live electrical components!**

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

## Wiring diagrams

On/Off

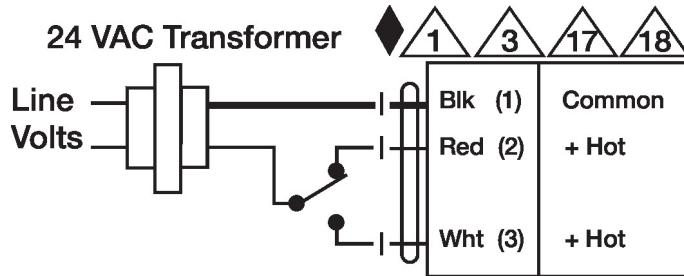

Floating Point

