



5-year warranty

Type overview

Type	DN
G7150-250	150

Technical data

Functional data	
Valve size [mm]	6" [150]
Fluid	chilled or hot water, up to 60% glycol
Fluid Temp Range (water)	32...350°F [0...176°C]
Body Pressure Rating	ANSI Class 250, up to 280 psi below 350°F
Flow characteristic	linear
Servicing	repack/rebuild kits available
Rangeability Sv	50:1
Flow Pattern	3-way Mixing
Leakage rate	ANSI Class III
Controllable flow range	stem up - open B - AB
Cv	340
Materials	
Valve body	Cast iron - ASTM A126 Class B
Valve plug	bronze
Stem	stainless steel
Stem seal	NLP EPDM (no lip packing)
Seat	Stainless steel AISI 316
Pipe connection	250 lb flanged
Suitable actuators	
Non-Spring	RVB(X) EVB(X)
Electrical fail-safe	(2*GKB(X))

Safety notes




- WARNING: This product can expose you to lead which is known to the State of California to cause cancer and reproductive harm. For more information go to www.p65warnings.ca.gov
- The valve has been designed for use in stationary heating, ventilation and air-conditioning systems and must not be used outside the specified field of application, especially in aircraft or in any other airborne means of transport.
- Only authorized specialists may carry out installation. All applicable legal or institutional installation regulations must be complied during installation.
- The valve does not contain any parts that can be replaced or repaired by the user.
- When determining the flow rate characteristic of controlled devices, the recognised directives must be observed.

Dimensions


Type	DN	Weight
G7150-250	150	286.6 lb [130 kg]

EVB, EVX, RVB, RVX

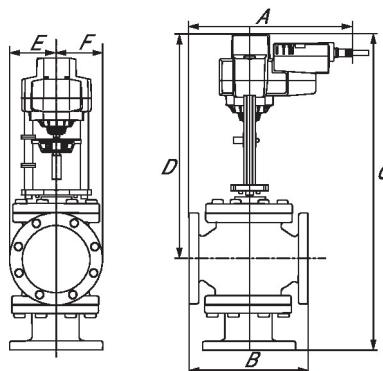

A	B	C	D	E	F	Number of Bolt Holes
18.6" [473]	18.6" [473]	30.4" [772]	19.4" [492]	6.3" [160]	6.3" [160]	12

2*GMB, 2*GMX, 2*GKB, 2*GKX

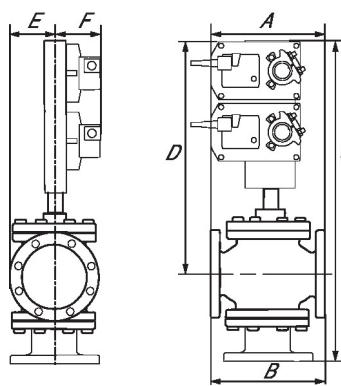

A	B	C	D	E	F	Number of Bolt Holes
16.5" [420]	18.6" [473]	30.4" [772]	19.4" [492]	5.5" [140]	6.3" [160]	12



5-year warranty

**Technical data**

Electrical data	
Nominal voltage	AC/DC 24 V
Nominal voltage frequency	50/60 Hz
Nominal voltage range	AC 19.2...28.8 V / DC 21.6...28.8 V
Power consumption in operation	6 W
Power consumption in rest position	1.5 W
Transformer sizing	11 VA
Electrical Connection	18 GA plenum cable, 1 m, with 1/2" conduit connector, degree of protection NEMA 2 / IP54
Overload Protection	electronic throughout full stroke
Electrical Protection	actuators are double insulated
Functional data	
Actuating force motor	4500 N [1010 lbf]
Position feedback U note	No Feedback
Direction of motion motor	selectable with switch
Manual override	5 mm hex crank (3/16" Allen), supplied
Stroke	2" [50 mm]
Running Time (Motor)	90 s /
Running time motor note	constant, independent of load
Noise level, motor	65 dB(A)
Position indication	Mechanical, with pointer
Safety data	
Power source UL	Class 2 Supply
Degree of protection IEC/EN	IP54
Degree of protection NEMA/UL	NEMA 2
Enclosure	UL Enclosure Type 2
Agency Listing	cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02, CE acc. to 2014/30/EU and 2014/35/EU
Quality Standard	ISO 9001
Ambient humidity	Max. 95% RH, non-condensing
Ambient temperature	-22...122°F [-30...50°C]
Storage temperature	-40...176°F [-40...80°C]
Servicing	maintenance-free
Weight	
Weight	9.02 lb [4.1 kg]
Materials	
Housing material	Die cast aluminium and plastic casing
Footnotes	
† Use flexible metal conduit. Push the listed conduit fitting device over the actuator's cable to butt against the enclosure. Screw in conduit connector. Jacket the actuators input wiring with listed flexible conduit. Properly terminate the conduit in a suitable junction box. Rated impulse Voltage 800V. Type of action 1. Control pollution degree 3.	

Accessories

Electrical accessories	Description	Type
	Battery backup system, for non-spring return models	NSV24 US
	Battery, 12 V, 1.2 Ah (two required)	NSV-BAT

Electrical installation

 **INSTALLATION NOTES**

 **2** Actuators may be connected in parallel. Power consumption and input impedance must be observed.

 **3** Actuators may also be powered by DC 24 V.

 **8** Control signal may be pulsed from either the Hot (Source) or Common (Sink) 24 V line.

 **9** For triac sink the common connection from the actuator must be connected to the hot connection of the controller. Contact closures A & B also can be triacs. A & B should both be closed for the triac source and open for triac sink.

 **18** Actuators with plenum cable do not have numbers; use color codes instead.

 Meets cULus requirements without the need of an electrical ground connection.


 **Warning! Live electrical components!**

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks.

Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

Wiring diagrams

On/Off

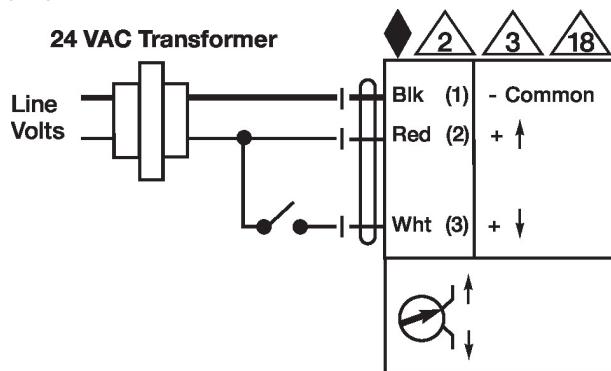

Floating Point

