

Actuator for smoke control dampers
90°

- Nominal Torque 40 Nm
- Nominal voltage AC 230 V
- Control Open-close
- Damper spindle Form fit 12x12 mm, Continuous hollow shaft


Technical data

Electrical data	Nominal voltage	AC 230 V
	Nominal voltage frequency	50/60 Hz
	Nominal voltage range	AC 198...264 V
	Switching thresholds min. ON voltage	AC 198 V
	Switching thresholds max. OFF voltage	AC 100 V
	Power consumption in operation	8 W
	Power consumption in rest position	0.5 W
	Power consumption for wire sizing	15 VA
	Auxiliary switch	2 x SPDT
	Switching capacity auxiliary switch	1 mA...6 (3) A, DC 5 V...AC 250 V
	Switching points auxiliary switch	3° / 87° (in relation to 0...90°)
	Tolerance	±2°
	Connection supply / control	1 m, 3 x 0.75 mm ² , halogen-free
	Connection auxiliary switch	1 m, 6 x 0.75 mm ² , halogen-free
	Functional data	Nominal torque
Inhibiting torque Dynamic		40 Nm
Inhibiting torque static (voltage-free)		50 Nm
Direction of rotation motor		Can be selected by mounting L/R
Angle of rotation		Max. 100°
Angle of rotation note		including 5° mechanical overrun at both sides
Running time motor		<60 s / 90°
Sound power level Motor		62 dB(A)
Damper spindle		Form fit 12x12 mm, Continuous hollow shaft
Position indication		Mechanically, with pointer
Service life		Min. 10,000 cycles
Safety	Protection class IEC/EN	II reinforced insulation
	Protection class auxiliary switch IEC/EN	II reinforced insulation
	Degree of protection IEC/EN	IP54
	EMC	CE according to 2014/30/EU
	Low voltage directive	CE according to 2014/35/EU
	Certification IEC/EN	IEC/EN 60730-1 and IEC/EN 60730-2-14
	Mode of operation	Type 1.B
	Rated impulse voltage supply / control	4 kV
	Rated impulse voltage auxiliary switch	2.5 kV
	Control pollution degree	3
	Ambient temperature	-30...50°C
	Non-operating temperature	-40...80°C
	Ambient humidity	Max. 95% r.h., non-condensing
Maintenance	Maintenance-free	
Weight	Weight	2.8 kg
	Multi-pack	Multi-pack 60 pcs.

Safety notes


- The device must not be used outside the specified field of application, especially not in aircraft or in any other airborne means of transport.
- Caution: Power supply voltage!

Safety notes

- The actuator is adapted to and installed on the smoke control damper by the damper manufacturer. For this reason, the actuator is only supplied direct to safety damper manufacturers. The manufacturer then bears full responsibility for the proper functioning of the damper.
- The two switches integrated in the actuator are to be operated either on power supply voltage or at safety extra-low voltage. The combination power supply voltage/ safety extra-low voltage is not permitted.
- Because of the fact that very high torques are applied to the damper spindle, the use of St50 (as a minimum) is recommended.
- The device may only be opened at the manufacturer's site. It does not contain any parts that can be replaced or repaired by the user.
- The device contains electrical and electronic components and must not be disposed of as household refuse. All locally valid regulations and requirements must be observed.

Product features

Mode of operation	2-wire open-close control. The actuator is overload-proof and can thus remain energised even at the end stops.
Signalling	Two microswitches with fixed settings are installed in the actuator for indicating the damper end positions. It should be noted with this application however that the contacts can no longer be used in the milliampere range after larger currents have been applied to them, even if this has taken place only once. The position of the damper blade can be read off on a mechanical position indication.
Manual operation	The hand crank included in the shipment can be used for manual operation of the actuator.
Standards / regulations	The design of the actuator is based on the specific requirements from the European standards: <ul style="list-style-type: none"> • EN 12101-8: Smoke and heat control systems - Part 8: Smoke control dampers • EN 1366-10: Fire resistance tests on service installations - Part 10: Smoke control dampers • EN 13501-4: Fire classification of construction products and building elements - Part 4: Classification using data from fire resistance tests on components of smoke control systems

Electrical installation




Notes

- Connection via safety isolating transformer.
- Parallel connection of other actuators possible. Observe the performance data and the switching thresholds.
- Combination of power supply voltage and safety extra-low voltage not permitted at the both auxiliary switches.

Wiring diagrams

AC 230 V, open-close

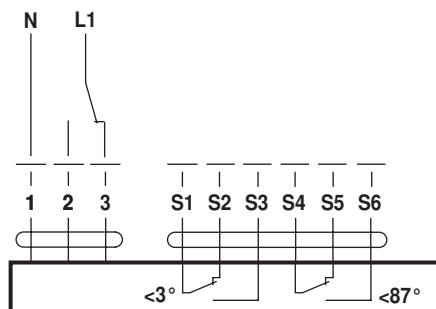

Dimensions [mm]

Dimensional drawings

