



2-year warranty

Type overview

Type	DN
B2050VS-02	15

Technical data

Functional data	
Valve size [mm]	0.5" [15]
Fluid	chilled or hot water, up to 60% glycol, steam
Fluid Temp Range (water)	-22...280°F [-30...138°C]
Body Pressure Rating	600 psig WOG
Close-off pressure Δ ps	600 psi
Flow characteristic	modified equal percentage
Max Differential Pressure (Steam)	35 psi
Flow Pattern	2-way
Leakage rate	ANSI Class VI
Controllable flow range	90° rotation
Cv	2
Maximum Inlet Pressure (Steam)	35 psi [241 kPa]
Maximum Velocity	15 FPS
Materials	
Valve body	Bronze B584-C84400
Housing seal	PTFE
Stem	316 stainless steel
Stem seal	RPTFE
Seat	RPTFE
Lock nut	stainless steel
Pipe connection	NPT
Retainer	B16 Brass
Ball	316 stainless steel
Suitable actuators	
Non-Spring	LMB(X) GRCB(X) GRB(X)
Spring	LF

Safety notes




- WARNING: This product can expose you to lead which is known to the State of California to cause cancer and reproductive harm. For more information go to www.p65warnings.ca.gov

Product features


Application	This valve is typically used in air handling units on heating or cooling coils, and fan coil unit heating or cooling coils. Some other common applications include Unit Ventilators, VAV Box reheat coils and bypass loops. This valve is suitable for use in a hydronic system with variable flow. This valve is designed with MFT functionally which facilitates the use of various control input.
Up to 35 psi steam	
1/2" - 2" 600 PSIG WOG, Cold Non-Shock	
Federal Specification: WW-V-35C, Type II	
Composition: BZ	
Style: 3	

Flow/Mounting details

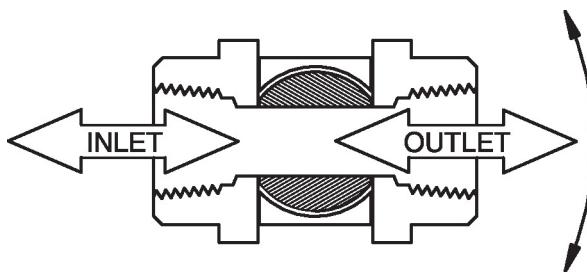

Dimensions

Type	DN	Weight
B2050VS-02	15	0.44 lb [0.20 kg]

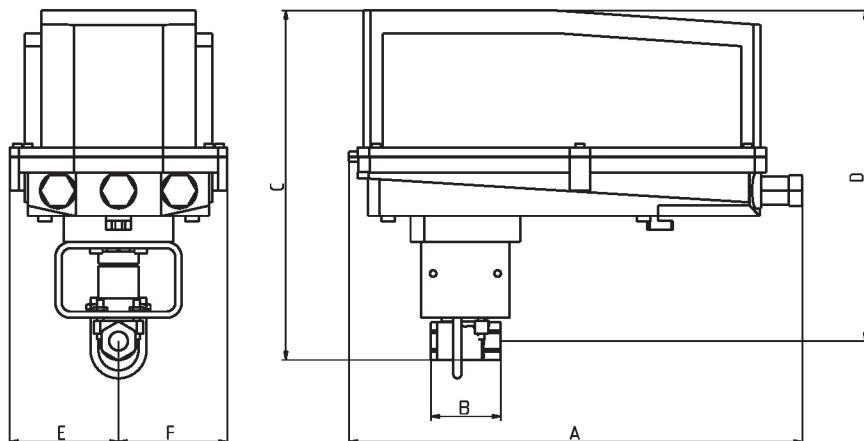

B2050VS..+GRC..N4

A	B	C	D	E	F
14.1" [358]	2.2" [56]	10.9" [277]	10.3" [262]	3.4" [86]	3.4" [86]



5-year warranty



Technical data

Electrical data	Nominal voltage	AC/DC 24 V
	Nominal voltage frequency	50/60 Hz
	Nominal voltage range	AC 19.2...28.8 V / DC 21.6...28.8 V
	Power consumption in operation	5 W
	Power consumption in rest position	2.5 W
	Transformer sizing	7 VA
	Electrical Connection	18 GA appliance cable, 1 m, with 1/2" conduit connector
	Overload Protection	electronic throughout 0...95° rotation
Functional data	Direction of motion motor	selectable with switch 0/1
	Direction of motion fail-safe	reversible with cw/ccw mounting
	Angle of rotation	90°
	Running Time (Motor)	75 s / 90°
	Running time fail-safe	<25 s @ -4...122°F [-20...50°C], <60 s @ -22°F [-30°C]
	Noise level, motor	50 dB(A)
	Noise level, fail-safe	62 dB(A)
	Position indication	Mechanical
Safety data	Power source UL	Class 2 Supply
	Degree of protection IEC/EN	IP54
	Degree of protection NEMA/UL	NEMA 2
	Enclosure	UL Enclosure Type 2
	Agency Listing	cULus acc. To UL 873 and CAN/CSA C22.2 No. 24-93
	Quality Standard	ISO 9001
	UL 2043 Compliant	Suitable for use in air plenums per Section 300.22(C) of the NEC and Section 602 of the IMC
	Ambient humidity	Max. 95% RH, non-condensing
	Ambient temperature	-22...122°F [-30...50°C]
	Storage temperature	-40...176°F [-40...80°C]
	Servicing	maintenance-free
Weight	Weight	3.2 lb [1.5 kg]
Materials	Housing material	galvanized steel

Footnotes †Rated Impulse Voltage 800V, Type of action 1.AA, Control Pollution Degree 3

Electrical installation

INSTALLATION NOTES

(A) Actuators with appliance cables are numbered.

- ◆ 1 Provide overload protection and disconnect as required.
- ◆ 3 Actuators may also be powered by DC 24 V.
- ◆ 11 Actuators may be connected in parallel if not mechanically linked. Power consumption and input impedance must be observed.
- ◆ Meets cULus requirements without the need of an electrical ground connection.
- ◆ Warning! Live electrical components!
During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

Wiring diagrams

On/Off

