


### 2-way, Characterized Control Valve, Stainless Steel Ball and Stem









Type overview	
Туре	DN
B213	15

## **Technical data**

Functional data	Valve size [mm]	0.5" [15]
	Fluid	chilled or hot water, up to 60% glycol
	Fluid Temp Range (water)	0250°F [-18120°C]
	Body Pressure Rating	600 psi
	Close-off pressure ∆ps	200 psi
	Flow characteristic	equal percentage
	Leakage rate	0% for A – AB
	Pipe connection	Internal thread
		NPT (female)
	Servicing	maintenance-free
	Flow Pattern	2-way
	Controllable flow range	75°
	Cv	4.7
Materials	Valve body	Nickel-plated brass body
	Stem	stainless steel
	Stem seal	EPDM (lubricated)
	Seat	PTFE
	Characterized disc	TEFZEL®
	O-ring	EPDM (lubricated)
	Ball	stainless steel
Suitable actuators	Non Fail-Safe	TR
		LRB(X)
		LRQB(X)
		NRB(X) N4
	Spring	TFRB(X)
		LF

## Safety notes



• WARNING: This product can expose you to lead which is known to the State of California to cause cancer and reproductive harm. For more information go to www.p65warnings.ca.gov



### **Product features**

### Application

This valve is typically used in air handling units on heating or cooling coils, and fan coil unit heating or cooling coils. Some other common applications include Unit Ventilators, VAV box re-heat coils and bypass loops. This valve is suitable for use in a hydronic system with variable flow.

## Flow/Mounting details


A AB 100%

A A AB 100%

A A AB 100%


Two-way valves should be installed with the disc upstream.

# Type DN Weight B213 15 0.65 lb [0.30 kg]

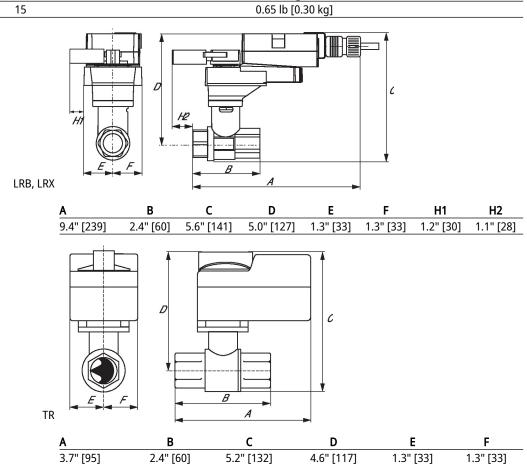



## **Dimensions**

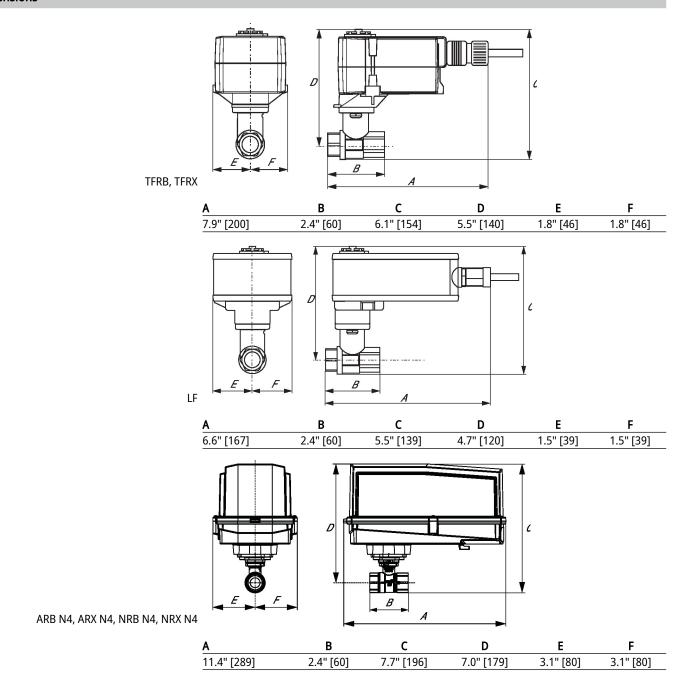







_		
100	nnica	いつきつ
166	hnical	ı uata

Electrical data	Nominal voltage	AC 100240 V
	Nominal voltage frequency	50/60 Hz
	Nominal voltage range	AC 85265 V
	Power consumption in operation	2.5 W
	Power consumption in rest position	1.3 W
	Transformer sizing	5 VA
	Electrical Connection	18 GA appliance cables, 1 m, 3 m or 5 m, with 1/2" NPT conduit connector
	Overload Protection	electronic throughout 095° rotation
Functional data	Position feedback U note	No Feedback
	Direction of motion motor	selectable by ccw/cw mounting
	Direction of motion fail-safe	reversible with cw/ccw mounting
	Angle of rotation	Max. 95°
	Angle of rotation note	adjustable with mechanical stop
	Running Time (Motor)	75 s
	Running time fail-safe	<75 s @ 20°C
	Noise level, motor	50 dB(A)
	Noise level, fail-safe	50 dB(A)
	Position indication	Mechanical
Safety data	Power source UL	Class 2 Supply
	Degree of protection IEC/EN	IP42
	Degree of protection NEMA/UL	NEMA 2
	Enclosure	UL Enclosure Type 2
	Agency Listing	cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02, CE acc. to 2014/30/EU
	Quality Standard	ISO 9001
	UL 2043 Compliant	Suitable for use in air plenums per Section 300.22(C) of the NEC and Section 602 of the IMC
	UL 2043 Compliant  Ambient humidity	300.22(C) of the NEC and Section 602 of the
		300.22(C) of the NEC and Section 602 of the IMC
	Ambient humidity	300.22(C) of the NEC and Section 602 of the IMC  Max. 95% RH, non-condensing
	Ambient humidity Ambient temperature	300.22(C) of the NEC and Section 602 of the IMC  Max. 95% RH, non-condensing  -22122°F [-3050°C]
Weight	Ambient humidity Ambient temperature Storage temperature	300.22(C) of the NEC and Section 602 of the IMC  Max. 95% RH, non-condensing  -22122°F [-3050°C]  -40176°F [-4080°C]

Footnotes †Rated Impulse Voltage 800V, Type of action 1.AA, Control Pollution Degree 3



### **Electrical installation**

### **X** INSTALLATION NOTES

(A) Actuators with appliance cables are numbered.

Provide overload protection and disconnect as required.

Actuators may be connected in parallel. Power consumption and input impedance must be observed.

**♦** N

Meets cULus requirements without the need of an electrical ground connection.

### Marning! Live electrical components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

#### Wiring diagrams On/Off

