

2-way, Characterized Control Valve, Stainless Steel Ball and Stem



5-year warranty

Type overview

Type	DN
B220HT1320	20

Technical data

Functional data	Valve size [mm]	0.75" [20]
Fluid	high temperature hot water/low pressure steam, up to 60% glycol	
Fluid Temp Range (water)	60...266°F [16...130°C]	
Fluid Temp Range (steam)	250°F [120°C]	
Body Pressure Rating	600 psi	
Close-off pressure Δ ps	200 psi	
Flow characteristic	equal percentage	
Pipe connection	Internal thread NPT (female)	
Servicing	maintenance-free	
Max Differential Pressure (Steam)	15 psi	
Flow Pattern	2-way	
Leakage rate	0%	
Controllable flow range	75°	
Cv	13.2	
Maximum Inlet Pressure (Steam)	15 psi	
Materials	Valve body	Nickel-plated brass (DZR) P-CuZn35Pb2
Stem	stainless steel	
Stem seal	Viton O-ring	
Seat	ETFE	
Characterized disc	ETFE	
O-ring	EPDM (lubricated)	
Ball	stainless steel	
Suitable actuators	Non Fail-Safe	LRB(X)
Spring	LF	

Safety notes




- WARNING: This product can expose you to lead which is known to the State of California to cause cancer and reproductive harm. For more information go to www.p65warnings.ca.gov

Product features

Application This valve is typically used in air handling units on heating or cooling coils, and fan coil unit heating or cooling coils. Some other common applications include unit ventilators, VAV box re-heat coils and bypass loops. This valve is suitable for use in a hydronic system with variable flow.



This valve is designed to fit in compact areas where on/off, floating point and modulating control is required using 24 VAC.

Flow/Mounting details

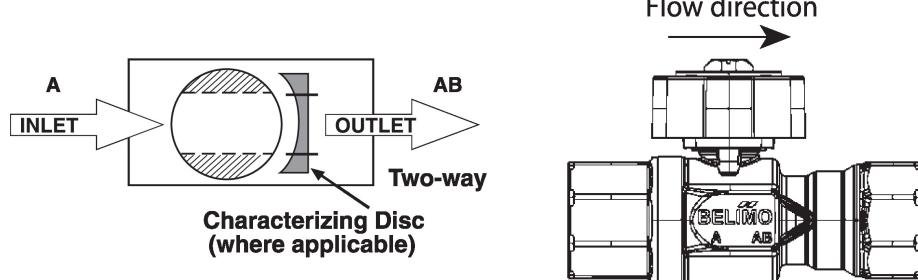

Dimensions

Type	DN	Weight
B220HT1320	20	0.93 lb [0.42 kg]

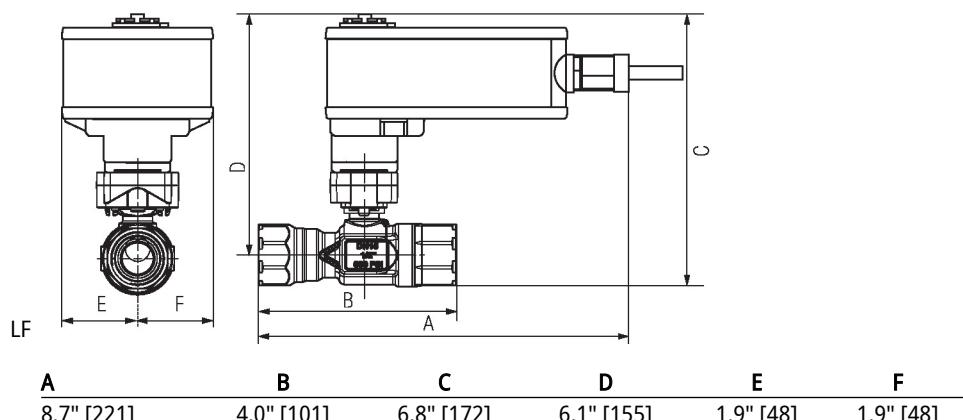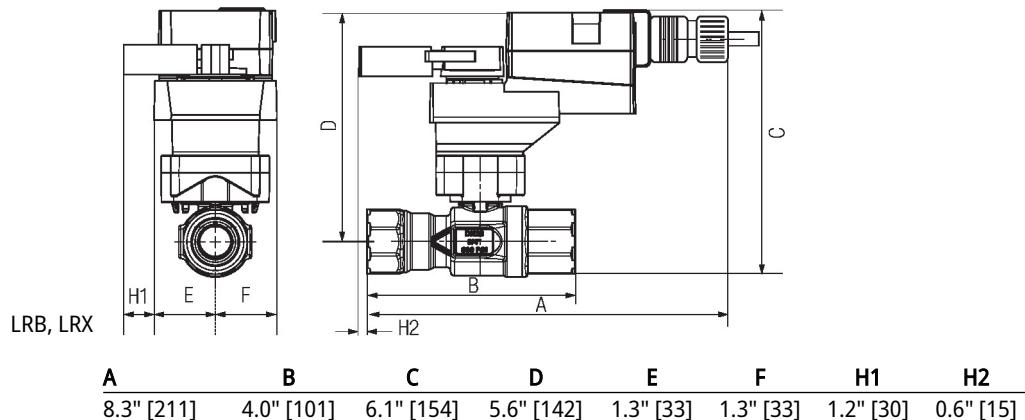

On/Off, Spring return, 120 V



5-year warranty



Technical data

Electrical data		
Nominal voltage	AC 120 V	
Nominal voltage frequency	50/60 Hz	
Nominal voltage range	AC 96...132 V	
Power consumption in operation	5.5 W	
Power consumption in rest position	3.5 W	
Transformer sizing	7.5 VA	
Auxiliary switch	1x SPDT, 1 mA...3 A (0.5 A inductive), DC 5 V...AC 250 V, adjustable 0...95°	
Switching capacity auxiliary switch	1 mA...3 A (0.5 A inductive), DC 5 V...AC 250 V	
Electrical Connection	(2) 18 GA appliance cables, 3 ft [1 m], with 1/2" NPT conduit connectors	
Overload Protection	electronic throughout 0...95° rotation	
Functional data		
Direction of motion motor	selectable with switch 0/1	
Direction of motion fail-safe	reversible with cw/ccw mounting	
Angle of rotation	90°	
Running Time (Motor)	75 s / 90°	
Running time fail-safe	<25 s @ -4...122°F [-20...50°C], <60 s @ -22°F [-30°C]	
Noise level, motor	50 dB(A)	
Noise level, fail-safe	62 dB(A)	
Position indication	Mechanical	
Safety data		
Degree of protection IEC/EN	IP54	
Degree of protection NEMA/UL	NEMA 2	
Enclosure	UL Enclosure Type 2	
Agency Listing	cULus acc. To UL 873 and CAN/CSA C22.2 No. 24-93	
Quality Standard	ISO 9001	
UL 2043 Compliant	Suitable for use in air plenums per Section 300.22(C) of the NEC and Section 602 of the IMC	
Ambient humidity	Max. 95% RH, non-condensing	
Ambient temperature	-22...122°F [-30...50°C]	
Storage temperature	-40...176°F [-40...80°C]	

Technical data

Safety data	Servicing	maintenance-free
Weight	Weight	□
Materials	Housing material	galvanized steel

Footnotes †Rated Impulse Voltage 800V, Type of action 1.AA, Control Pollution Degree 3

Electrical installation


 **INSTALLATION NOTES**

- Ⓐ Actuators with appliance cables are numbered.
- △1 Provide overload protection and disconnect as required.
- △11 Actuators may be connected in parallel if not mechanically linked. Power consumption and input impedance must be observed.
- △44 One built-in auxiliary switch (1x SPDT), for end position indication, interlock control, fan startup, etc.
- ⚡ Apply only AC line voltage or only UL-Class 2 voltage to the terminals of auxiliary switches. Mixed or combined operation of line voltage/safety extra low voltage is not allowed.
- ◆ Meets cULus requirements without the need of an electrical ground connection.
- ⚠ Warning! Live electrical components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

Wiring diagrams

On/Off

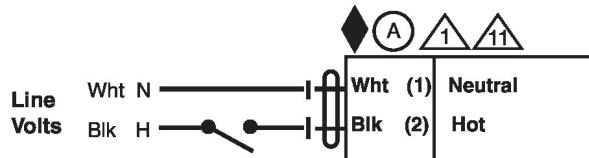

Auxiliary Switches

