

3-way Mixing/Diverting, Characterized Control Valve, Stainless Steel Ball and Stem









		Picture may differ from product	
Type overview			
Туре			DN
B315		1/2" [15]	
Technical data			
	Functional data	Valve size [mm]	0.5" [15]
		Fluid	chilled or hot water, up to 60% glycol
		Fluid Temp Range (water)	0250°F [-18120°C]
		Body Pressure Rating	600 psi
		Close-off pressure ∆ps	200 psi
		Flow	A-port: as stated in chart B-port: 70% of A – AB Cv
		Flow characteristic	A-port equal percentage, B-port modified for constant common port flow
		Leakage rate	0% for A – AB, <2.0% for B – AB
		Pipe connection	Internal thread
			NPT (female)
		Servicing	maintenance-free
		Flow Pattern	3-way Mixing/Diverting

Controllable flow range

Materials

Suitable actuators

Cv	10
Valve body	Nickel-plated brass body
Stem	stainless steel
Stem seal	EPDM (lubricated)
Seat	PTFE
Characterized disc	TEFZEL®
O-ring	EPDM (lubricated)
Ball	stainless steel
Non Fail-Safe	TR LRB(X) LRQB(X) NRB(X) N4

75°

Safety notes



Spring

• WARNING: This product can expose you to lead which is known to the State of California to cause cancer and reproductive harm. For more information go to www.p65warnings.ca.gov

TFRB(X)

LF




Product features

Application

This valve is typically used in air handling units on heating or cooling coils, and fan coil unit heating or cooling coils. Some other common applications include Unit Ventilators, VAV box re-heat coils and bypass loops. This valve is suitable for use in a hydronic system with variable or constant flow.


Flow/Mounting details


This valve is not suitable for use as a change over valve.

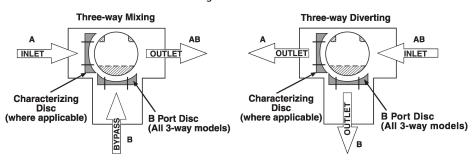


Dimensions


Туре	DN	Weight
R315	1/2" [15]	0.71 lb [0.32 kg]

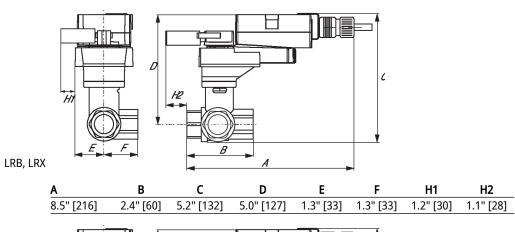

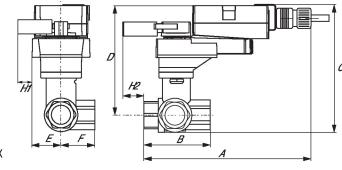

LRQB, LRQX




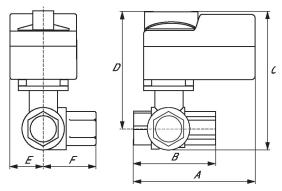



TR




Dimensions



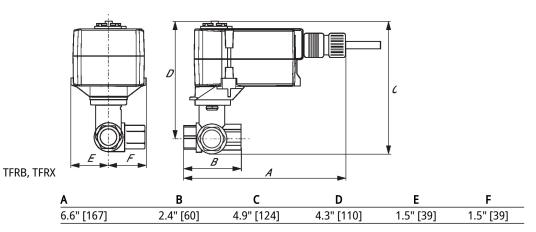

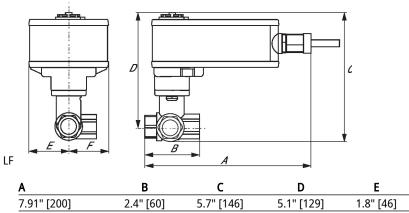

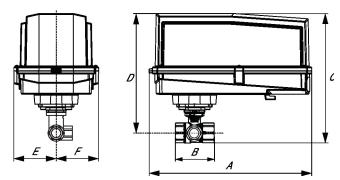

ARB N4, ARX N4

Α	В	С	D	E	F
11.4" [289]	2.4" [60]	7.2" [184]	6.7" [169]	3.1" [80]	3.1" [80]

1.8" [46]



On/Off, Spring return, 24 V







_		
100	anical	data
	шиа	uala

Electrical data	Nominal voltage	AC/DC 24 V
	Nominal voltage frequency	50/60 Hz
	Nominal voltage range	AC 19.228.8 V / DC 21.628.8 V
	Power consumption in operation	2 W
	Power consumption in rest position	1.3 W
	Transformer sizing	5 VA
	Auxiliary switch	1x SPDT, 1 mA3 A (0.5 A inductive), DC 5 VAC 250 V, adjustable 095°
	Switching capacity auxiliary switch	1 mA3 A (0.5 A inductive), DC 5 VAC 250 V
	Electrical Connection	(2) 18 GA appliance cables, 3 ft [1 m], with 1/2" NPT conduit connectors
	Overload Protection	electronic throughout 095° rotation
Functional data	Position feedback U note	No Feedback
	Direction of motion motor	selectable by ccw/cw mounting
	Direction of motion fail-safe	reversible with cw/ccw mounting
	Angle of rotation	Max. 95°
	Running Time (Motor)	75 s
	Running time fail-safe	<75 s
	Noise level, motor	50 dB(A)
	Noise level, fail-safe	50 dB(A)
	Position indication	Mechanical
Safety data	Power source UL	Class 2 Supply
	Degree of protection IEC/EN	IP42
	Degree of protection NEMA/UL	NEMA 2
	Enclosure	UL Enclosure Type 2
	Agency Listing	cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02, CE acc. to 2014/30/EU
	Quality Standard	ISO 9001
	UL 2043 Compliant	Suitable for use in air plenums per Section 300.22(C) of the NEC and Section 602 of the IMC
	Ambient humidity	Max. 95% RH, non-condensing
	Ambient temperature	-22122°F [-3050°C]
	Storage temperature	-40176°F [-4080°C]
	Servicing	maintenance-free
Weight	Weight	1.6 lb [0.72 kg]



Technical data

Materials Housing material UL94-5VA

Footnotes †Rated Impulse Voltage 800V, Type of action 1.AA, Control Pollution Degree 3

Electrical installation

X INSTALLATION NOTES

A) Actuators with appliance cables are numbered.

\ Provide overload protection and disconnect as required.

Actuators may be connected in parallel. Power consumption and input impedance must be observed.

Actuators may also be powered by DC 24 V.

One built-in auxiliary switch (1x SPDT), for end position indication, interlock control, fan startup, etc.

 $\label{lem:meets} \mbox{Meets cULus requirements without the need of an electrical ground connection.}$

Warning! Live electrical components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

Apply only AC line voltage or only UL-Class 2 voltage to the terminals of auxiliary switches. Mixed or combined operation of line voltage/safety extra low voltage is not allowed.

Wiring diagrams On/Off

