


3-way Mixing/Diverting, Characterized Control Valve, Stainless Steel Ball and Stem









Type overview DN Type 1 1/4" [32] B331 **Technical data Functional data** Valve size [mm] 1.25" [32] Fluid chilled or hot water, up to 60% glycol Fluid Temp Range (water) 0...250°F [-18...120°C] **Body Pressure Rating** 400 psi Close-off pressure Δps 200 psi Flow A-port: as stated in chart B-port: 70% of A - AB Flow characteristic A-port equal percentage, B-port modified for constant common port flow 0% for A - AB, <2.0% for B - AB Leakage rate Pipe connection Internal thread NPT (female) Servicing maintenance-free Flow Pattern 3-way Mixing/Diverting Controllable flow range 75° Cv 25 Materials Nickel-plated brass body Valve body Stem stainless steel Stem seal EPDM (lubricated) Seat PTFE Characterized disc Ryton PPS 0-ring EPDM (lubricated) Ball stainless steel Suitable actuators Non Fail-Safe ARB(X) ARQB(X) ARB(X) N4

Safety notes



Spring

 WARNING: This product can expose you to lead which is known to the State of California to cause cancer and reproductive harm. For more information go to www.p65warnings.ca.gov

AFRB(X)



Product features

Application

This valve is typically used in air handling units on heating or cooling coils, and fan coil unit heating or cooling coils. Some other common applications include Unit Ventilators, VAV box re-heat coils and bypass loops. This valve is suitable for use in a hydronic system with variable or constant flow.


Flow/Mounting details

This valve is not suitable for use as a change over valve.





Dimensions



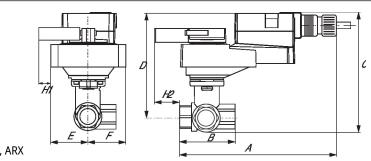



ARB, ARX



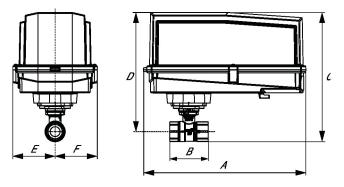

ARB N4, ARX N4, NRB N4, NRX N4



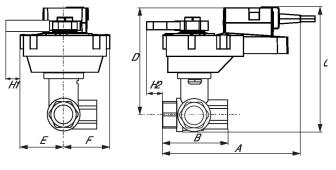


ARQB, ARQX

A	В	C	ט	E	F	Hil	HZ
9.7" [246]	4.0" [101]	7.5" [191]	6.2" [158]	1.77" [44]	2.1" [54]	1.4" [34]	0.8" [20]



Dimensions

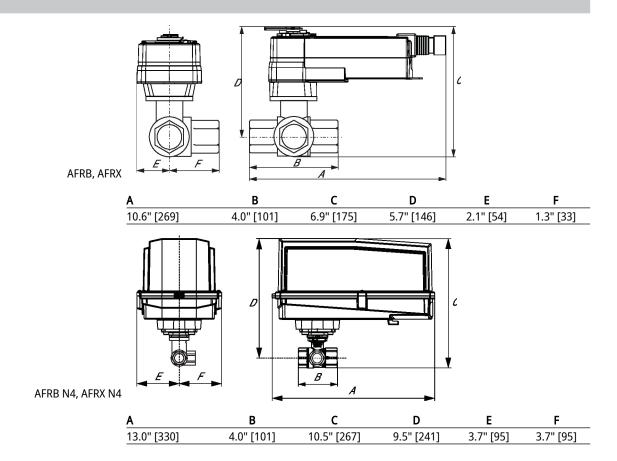



Modulating, Non fail-safe, 24 V





5-year warranty





echnical data			
Electrical data	Nominal voltage	AC/DC 24 V	
	Nominal voltage frequency	50/60 Hz	
	Nominal voltage range	AC 19.228.8 V / DC 21.628.8 V	
	Power consumption in operation	2.5 W	
	Power consumption in rest position	0.4 W	
	Transformer sizing	5 VA	
	Electrical Connection	18 AWG plenum cable, 1 m, with 1/2" NPT conduit connector	
	Overload Protection	electronic thoughout 090° rotation	
Functional data	Operating range Y	210 V	
	Operating range Y note	420 mA w/ ZG-R01 (500 Ω, 1/4 W resistor)	
	Input impedance	100 kΩ for 210 V (0.1 mA), 500 Ω for 420	
		mA	
	Position feedback U	210 V	
	Position feedback U note	Max. 1 mA	
	Direction of motion motor	selectable with switch 0/1	
	Manual override	external push button	
	Angle of rotation	90°	
	Angle of rotation note	adjustable with mechanical stop	
	Running Time (Motor)	90 s / 90°	
	Noise level, motor	45 dB(A)	
	Position indication	Mechanical, pluggable	
Safety data	Power source UL	Class 2 Supply	
	Degree of protection NEMA/UL	NEMA 2	
	Housing	UL Enclosure Type 2	
	Agency Listing	cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02, CE acc. to 2014/30/EU	
	Quality Standard	ISO 9001	
	UL 2043 Compliant	Suitable for use in air plenums per Section 300.22(C) of the NEC and Section 602 of the IMC	
	Ambient humidity	Max. 95% RH, non-condensing	

Ambient temperature

-22...122°F [-30...50°C]



Safety data	Storage temperature	-40176°F [-4080°C]	
	Servicing	maintenance-free	
Weight Weight		2.2 lb [1 kg]	
Materials	Housing material	Galvanized steel and plastic housing	

Footnotes †Rated Impulse Voltage 800 V, Type action 1, Control Pollution Degree 3.

Electrical installation

K INSTALLATION NOTES

1 Provide overload protection and disconnect as required.

Actuators may be connected in parallel. Power consumption and input impedance must be observed.

6 Only connect common to negative (-) leg of control circuits.

 \bigwedge A 500 Ω resistor (ZG-R01) converts the 4...20 mA control signal to 2...10 V.

Actuators with plenum cable do not have numbers; use color codes instead.

Meets cULus requirements without the need of an electrical ground connection.

Warning! Live electrical components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

Wiring diagrams

2...10 V / 4...20 mA Control

