

## **Butterfly Valve with**

- Disc 304 stainless steel
- Bubble tight shut-off
- Resilient seat
- Valve face-to-face dimensions comply with API 609 & MSS-SP-67
- Completely assembled and tested, ready for installation





Type overview			
Туре			DN
F6600HD			600
Technical data			
Function	onal data Valve size	[mm]	24" [600]
	Fluid		chilled or hot water, up to 60% glycol
	Fluid Tem	p Range (water)	-22250°F [-30120°C]
	Body Pres	sure Rating	ANSI Class Consistent with 125, 232 psi CWP
	Close-off	oressure Δps	150 psi
	Flow chara	acteristic	modified equal percentage
	Leakage r	ate	0% leakage, leakage rateA
	Pipe conn	ection	Flange for use with ASME/ANSI class 125/150
	Servicing		maintenance-free
	Flow Patte	ern	2-way
	Controllab	ole flow range	90° rotation
	Cv		43116
	Maximum	Velocity	12 FPS
	Lug threa	ds	1 1/4-7 UNC
	<b>Materials</b> Valve bod	y	Ductile cast iron ASTM A536
	Body finis	h	epoxy powder coating (blue RAL 5002)
	Stem		416 stainless steel
	Stem seal		EPDM (lubricated)
	Seat		EPDM
	Disc		304 stainless steel

Suitable actuators


Non Fail-Safe

SY11




# **Product features**

# Flow/Mounting details

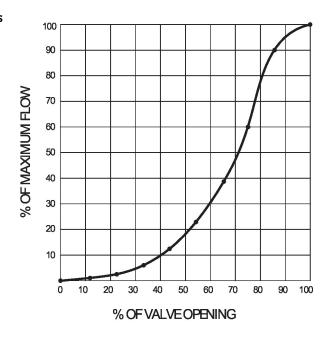

# Dimensions

Туре	DN	Weight	
F6600HD	600	710 lb [320 kg]	

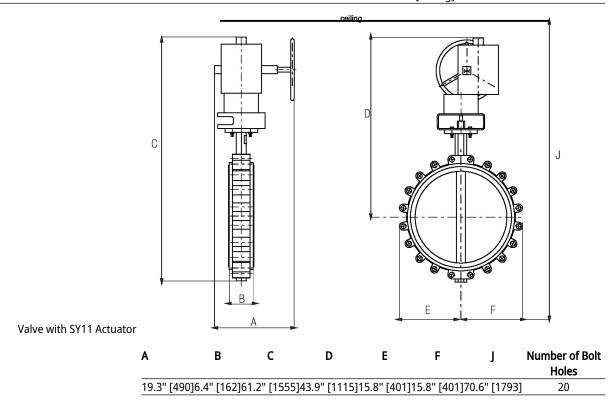



# On/Off, Floating point, Non fail-safe, 120 V





chnical data		
Electrical data	Nominal voltage	AC 120 V
	Nominal voltage frequency	50/60 Hz
	Nominal voltage range	AC 96132 V
	Current consumption	3.6 A
	Auxiliary switch	2x SPDT, 1 mA5 A (3 A inductive), DC 5 VAl 250 V, 1 x 3° / 1 x 87°
	Switching capacity auxiliary switch	1 mA5 A (3 A inductive), DC 5 VAC 250 V
	Electrical Connection	Terminal blocks
	Overload Protection	thermally protected 135°C cut-out
	Internal Humidty Control	resistive heating element
Functional data	Torque motor	3000 Nm
	Direction of motion motor	selectable with switch 0/1
	Manual override	hand wheel
	Angle of rotation	90°
	Running Time (Motor)	62 s
	Duty cycle value	30%
	Noise level, motor	45 dB(A)
	Position indication	top mounted domed indicator
Safety data	Degree of protection IEC/EN	IP66/67
	Degree of protection NEMA/UL	NEMA 4X
	Enclosure	UL Enclosure Type 4X
	Agency Listing	ISO, CE, cCSAus
	Quality Standard	ISO 9001
	Ambient humidity	Max. 100% RH
	Ambient temperature	-22149°F [-3065°C]
	Storage temperature	-40176°F [-4080°C]
	Servicing	maintenance-free
Weight	Weight	150 lb [70 kg]
Materials	Housing material	die cast aluminium



#### **Product features**

### **Application**

SY Series actuators are fractional horsepower devices, and utilize full-wave power supplies. Observe wire sizing and transformer sizing requirements. Proportional models CANNOT be connected to Belimo direct coupled (AF, AM, GM...etc) actuator power supplies or any type of half-wave device. You MUST use a separate, dedicated transformer or power supply to power the SY actuator. Please do not connect other automation equipment to the dedicated SY supply source. You MUST use four wires (plus a ground) to control a proportional control SY actuator (See SY Wiring Section).

#### **Accessories**

Electrical accessories	Description	Туре
	Local electric disconnect for SY412 series actuator, AC 120 V, on/off	HOA-120V
	Battery backup system for SY712 series actuator, AC 120 V, on/off	EXT-NSV-B05-120

#### **Electrical installation**



#### **INSTALLATION NOTES**

Do not change sensitivity or dip switch setting with power applied.

Power supply Common/Neutral and Control Signal "-"wiring to a common is prohibited. Terminals 4 and 6 need to be wired separately.



isolation relays must be used in parallel connection of multiple actuators using a common control signal inputs. The relays should be DPDT.

fisolation relays are required in parallel applications. The reason parallel applications need isolation relays is that the motor uses two sets of windings, one for each direction. When one is energized to turn the actuator in a specific direction a voltage is generated in the other due to the magnetic field created from the first. It's called back EMF. This is not an issue with one actuator because the voltage generated in the second winding isn't connected to anything so there is no flow. On parallel applications without isolation, this EMF voltage energizes the winding it is connected to on the other actuators in the system, the actuators are tying to turn in both directions at once. The EMF voltage is always less than the supply voltage due to the resistance of the windings, so while the actuator still turns in the commanded direction, the drag from the other reduces the torque output and causes overheating.



# Marning! Live electrical components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.



# **Electrical installation**

## Wiring diagrams

AC/DC 110/120 or 220/230V

