

Resilient Seat, 304 Stainless Steel Disc

Butterfly Valve with Lug types

- Disc 304 stainless steel
- Bubble tight shut-off
- Resilient seat
- Valve face-to-face dimensions comply with API 609 & MSS-SP-67
- Completely assembled and tested, ready for installation



2-year warranty

Type overview


Type	DN
F7350HD	350

Technical data


Functional data	
Valve size [mm]	14" [350]
Fluid	chilled or hot water, up to 60% glycol
Fluid Temp Range (water)	-22...250°F [-30...120°C]
Body Pressure Rating	ANSI Class Consistent with 125, 232 psi CWP
Close-off pressure Δps	200 psi
Flow characteristic	modified linear
Servicing	maintenance-free
Flow Pattern	3-way Mixing/Diverting
Leakage rate	0%
Controllable flow range	90° rotation
Cv	11917
Maximum Velocity	12 FPS
Lug threads	1-8 UNC
Materials	
Valve body	Ductile cast iron ASTM A536
Body finish	epoxy powder coating (blue RAL 5002)
Stem	416 stainless steel
Seat	EPDM
Pipe connection	for use with ANSI class 125/150 flanges
Bearing	RPTFE
Disc	304 stainless steel
Gear operator materials	Gears - hardened steel
Suitable actuators	
Non-Spring	SY7

Dimensions

Type	DN	Weight
F7350HD	350	639.3 lb [290 kg]

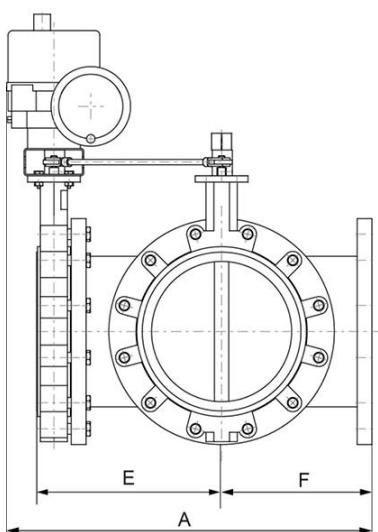

Valve with SY6 Actuator

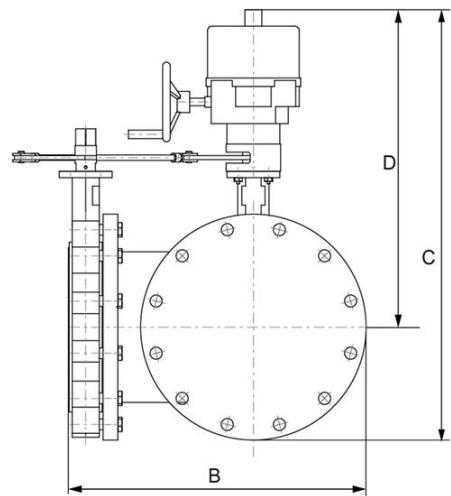

A	B	C	D	E	F	J	Number of Bolt Holes
34.1" [866]	27.9" [709]	40.4" [1025]	29.6" [751]	17.2" [438]	14.0" [356]	8.9" [225]	12

On/Off, Floating point, Non fail-safe, 120 V



2-year warranty

Technical data

Electrical data		
Nominal voltage	AC 120 V	
Nominal voltage frequency	50/60 Hz	
Nominal voltage range	AC 96...132 V	
Transformer sizing	288 VA	
Current consumption	2.4 A	
Auxiliary switch	2x SPDT, 1 mA...5 A (3 A inductive), DC 5 V...AC 250 V, 1 x 3° / 1 x 87°	
Switching capacity auxiliary switch	1 mA...5 A (3 A inductive), DC 5 V...AC 250 V	
Electrical Connection	Terminal blocks	
Overload Protection	thermally protected 135°C cut-out	
Internal Humidity Control	resistive heating element	
Functional data		
Torque motor	650 Nm	
Direction of motion motor	selectable with switch 0/1	
Manual override	hand wheel	
Angle of rotation	90°	
Running Time (Motor)	34 s	
Duty cycle value	30%	
Noise level, motor	45 dB(A)	
Position indication	top mounted domed indicator	
Safety data		
Degree of protection IEC/EN	IP66/67	
Degree of protection NEMA/UL	NEMA 4X	
Enclosure	UL Enclosure Type 4X	
Agency Listing	ISO, CE, cCSAus	
Quality Standard	ISO 9001	
Ambient humidity	Max. 100% RH	
Ambient temperature	-22...149°F [-30...65°C]	
Storage temperature	-40...176°F [-40...80°C]	
Servicing	maintenance-free	
Weight		
Weight	46 lb [21 kg]	
Materials		
Housing material	die cast aluminium	
Gear train	high alloy steel gear sets, self locking	

Product features

Application SY Series actuators are fractional horsepower devices, and utilize full-wave power supplies. Observe wire sizing and transformer sizing requirements. Proportional models CANNOT be connected to Belimo direct coupled (AF, AM, GM...etc) actuator power supplies or any type of half-wave device. You MUST use a separate, dedicated transformer or power supply to power the SY actuator. Please do not connect other automation equipment to the dedicated SY supply source. You MUST use four wires (plus a ground) to control a proportional control SY actuator (See SY Wiring Section).

Accessories

Electrical accessories	Description	Type
	Local electric disconnect for SY4...12 series actuator, AC 120 V, on/off	HOA-120V
	Battery backup system for SY4...6 series actuator, AC 120 V, on/off	EXT-NSV-B03-120
	Battery backup system for SY4...6 series actuator, AC 120 V, MFT	EXT-NSV-B04-120

Electrical installation

 **INSTALLATION NOTES**

-  Do not change sensitivity or dip switch setting with power applied.
-  Power supply Common/Neutral and Control Signal "-"wiring to a common is prohibited. Terminals 4 and 6 need to be wired separately.
-  Isolation relays must be used in parallel connection of multiple actuators using a common control signal inputs. The relays should be DPDT.
-  Isolation relays are required in parallel applications. The reason parallel applications need isolation relays is that the motor uses two sets of windings, one for each direction. When one is energized to turn the actuator in a specific direction a voltage is generated in the other due to the magnetic field created from the first. It's called back EMF. This is not an issue with one actuator because the voltage generated in the second winding isn't connected to anything so there is no flow. On parallel applications without isolation, this EMF voltage energizes the winding it is connected to on the other actuators in the system, the actuators are tying to turn in both directions at once. The EMF voltage is always less than the supply voltage due to the resistance of the windings, so while the actuator still turns in the commanded direction, the drag from the other reduces the torque output and causes overheating.
-  **Warning! Live electrical components!**
During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

Electrical installation

Wiring diagrams

AC/DC 110/120 or 220/230V

AC 110/120 or 220/230 V

